

Productivity Line of Air Tools

**MADE IN
TAIWAN**



De Poan Pneumatic Corp.

ABOUT US

Since 1983, De Poan Pneumatic Corp. has been specializing in pneumatic tools manufacturing for over 41 years. Today, we continue to pioneer new products in all areas of professional tools that increase productivity and make work easier to perform. We are dedicated to be the undisputed provider of choice for quality products with innovative design, extra feature, and consistent quality that help us earned the reputation from our worldwide customers.

Every single product left our facility has passing through complete inspection and testing to ensure the quality consistency. With standardize manufacturing process, we are committed to produce the products with optimal capacity. Such core competence enhanced from our expertise in R&D, Quality, and Manufacturing has proven to sustain our customer satisfaction continuously.

We promise to deliver productivity to customers seeking peak performance in today's demanding environments by providing innovative products. This proven productivity is enabled through our advanced engineering knowledge and manufacturing system from decades experience. With innovative features on our products, we expect to expand the market sales and grow the business with customers together.



TABLE OF CONTENTS

Page 5-6

AIR BODY SAW

Page 7-10

ANGLE IMPACT WRENCH

Page 11-30

IMPACT WRENCH

Page 31-34

SANDER

Page 35-38

PROFESSIONAL AIR TOOLS

Page 39-40

MINI AIR TOOLS

Page 41-42

RATCHET WRENCH

GRAPHIC ILLUSTRATION



Two robust, forged ring hammers provide for a reliable continuous torque increase with the use of surprisingly few parts.



Similar to the Twin Hammer but with a single hammer. This wider version is made to produce instantaneous high torque.



The Pinless impact mechanism conveys power directly to the anvil with fewer parts for reduced vibration and maintenance. The Pinless hammer is designed for heavy-duty applications.



One hand forward and reverse switch (Patented)

IMPACT WRENCH PRODUCT LINE

3/8"
 2331T
 Twin hammer
 515 Nm
 380 ft-lb
 8,300 rpm



3/8" Mini
 2341J
 Jumbo hammer
 583 Nm
 430 ft-lb
 8,500 rpm



3/8" Mini
 2341T
 Twin hammer
 542 Nm
 400 ft-lb
 8,500 rpm



3/8" Mini
 2342J
 Jumbo hammer
 583 Nm
 430 ft-lb
 8,500 rpm



3/8" Mini
 2342T
 Twin hammer
 542 Nm
 400 ft-lb
 8,500 rpm



3/8" Mini
 2343J
 Jumbo hammer
 583 Nm
 430 ft-lb
 8,500 rpm



3/8" Mini
 2343T
 Twin hammer
 542 Nm
 400 ft-lb
 8,500 rpm



3/8" Angle
 2325J
 Jumbo hammer
 407 Nm
 300 ft-lb
 9,500 rpm



3/8" Angle
 2336J
 Jumbo hammer
 550 Nm
 405 ft-lb
 8,500 rpm



1/2" Angle
 2425J
 Jumbo hammer
 407 Nm
 300 ft-lb
 9,500 rpm



1/2" Angle
 2436J
 Jumbo hammer
 550 Nm
 405 ft-lb
 8,500 rpm



1/2" Mini
 2441J
 Jumbo hammer
 746 Nm
 550 ft-lb
 9,500 rpm



1/2" Mini
 2441T
 Twin hammer
 678 Nm
 500 ft-lb
 7,800 rpm



1/2" Mini
 2442J
 Jumbo hammer
 746 Nm
 550 ft-lb
 9,500 rpm



1/2" Mini
 2442T
 Twin hammer
 651 Nm
 480 ft-lb
 9,500 rpm



1/2" Mini
 2443J
 Jumbo hammer
 746 Nm
 550 ft-lb
 9,500 rpm



1/2" Mini
 2443T
 Twin hammer
 678 Nm
 500 ft-lb
 7,800 rpm



1/2"
 2431T
 Twin hammer
 515 Nm
 380 ft-lb
 8,300 rpm



1/2"
 2461T
 Twin hammer
 1,085 Nm
 800 ft-lb
 7,300 rpm



1/2"
 2462T
 Twin hammer
 1,125 Nm
 830 ft-lb
 7,500 rpm



1/2"
 2463T
 Twin hammer
 1,085 Nm
 800 ft-lb
 7,300 rpm



3/4"
 2561T
 Twin hammer
 1,085 Nm
 800 ft-lb
 7,300 rpm



3/4"
 2562T
 Twin hammer
 1,125 Nm
 830 ft-lb
 7,500 rpm



3/4"
 2563T
 Twin hammer
 1,085 Nm
 800 ft-lb
 7,300 rpm



3/4"
 2641T
 Twin hammer
 1,898 Nm
 1,400 ft-lb
 5,300 rpm



3/4"
 2643T
 Twin hammer
 1,898 Nm
 1,400 ft-lb
 5,300 rpm



1"
 2741T
 Twin hammer
 1,898 Nm
 1,400 ft-lb
 5,300 rpm



1"
 2743T
 Twin hammer
 1,898 Nm
 1,400 ft-lb
 5,300 rpm



1"
 2801T
 Twin hammer
 2,983 Nm
 2,200 ft-lb
 5,500 rpm



1"
 2801L
 Pinless
 2,712 Nm
 2,000 ft-lb
 5,500 rpm





LOW VIBRATION HIGH PERFORMANCE

MOST COMPACT AIR BODY SAW

7101



1 EXCELLENT PERFORMANCE

Cut through sheet metal up to 3 mm

2 PATENTED DESIGN

Vibration reduced mechanism

3 SAFETY DESIGN

Safety trigger to prevent accidental start ups

4 ERGONOMICS HANDLE

Light weight and compact design for comfort

5 REAR EXHAUST

Rear exhaust direct air away from work piece

Model	Vibration	Speed	Sound Power	Sound Pressure	Length		Weight		Avg. Air Cons.		Min Hoses	Air inlet
	m/s ²	spm	dBA	dBA	mm	in.	kg	lb	l/min	cfm	in.	in.
7101	1	9,500	102	91	160	6.3	0.4	0.9	99	3.5	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.

LOW VIBRATION MULTIPLE APPLICATIONS

7102



STROKE
10 mm

1 EXCELLENT PERFORMANCE

*Cutting through thin metal, structurals, pipes
Deburring or sharpening sheet metal, iron or plastic*

2 PATENTED DESIGN

Vibration reduced mechanism

3 SAFETY DESIGN

Safety trigger to prevent accidental start ups

4 REAR EXHAUST

Rear exhaust direct air away from work piece

3 in 1 Design



Bi-Metal
Pneumatic Saw Blade (24T, 32T)



Bi-Metal
Reciprocating Saw Blade (18T)



5pcs File
(Rectangular, Half Round, Round, Triangular, Square)
Shank Diameter: 4mm

Model	Vibration	Speed	Sound Power	Sound Pressure	Length		Weight		Avg. Air Cons.		Min Hoes	Air inlet
	m/s ²	spm	dBA	dBA	mm	in.	kg	lb	l/min	cfm	in.	in.
7102	1	9,500	102	91	160	6.3	0.4	0.9	99	3.5	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.

NEW



MULTI-ANGLE IMPACT WRENCH

2336J (3/8" Drive)

2436J (1/2" Drive)

JUMBO HAMMER

1 COMPACT SIZE

Easy to work in confined areas and 3.09 lbs. (1.4 kg) only

2 FORWARD 2 TORQUE SETTINGS

Easy and quick control F/R settings

3 360° SWIVELING HEAD

360° swiveling head to easy work in confined areas

4 SWIVEL RANGE 45°

12 Steps angle rotating

5 FEATHER THROTTLE

EFor priefcise control of needed torque

6 TURNABLE HANDLE 360°



Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Length		Avg. Air Cons.		Min Hoes in.	Air inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	mm	in.	l/min	cfm		
2336J	10	3/8	8,500	550	405	136-312	100-230	247	9.7	122	4.3	3/8	1/4
2436J	13	1/2											

Listed specifications are for reference only. Please check our website for updates.



GEARLESS ANGLE IMPACT WRENCH

2325J (3/8" Drive)

2425J (1/2" Drive)

JUMBO HAMMER

**Breakaway Torque
680 Nm (550 ft-lb)**



1 COMPACT SIZE

Easy to work in confined areas and 2.43 lbs. (1.10 kg) only

2 POWERFUL TORQUE

The gearless mechanism for direct drive transmission

3 CENTRAL EXHAUST

360° rotating exhaust to direct air away from user

4 FEATHER THROTTLE

For precise control of needed torque

5 ROTATING F/R RING

*Easy and quick control F/R in 2 speed settings
Patent pending design*

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Length		Avg. Air Cons.		Min Hoes In.	Air Inlet In.
	mm	In.		Nm	ft-lb	Nm	ft-lb	mm	In.	lit/min	cfm		
2325J	11	3/8	9,500	410	300	110-270	80-200	247	9.7	110	3.8	3/8	1/4
2425J	13	1/2											

Listed specifications are for reference only. Please check our website for updates.



3/8" IMPACT WRENCH

2331T

TWIN HAMMER



**Breakaway Torque
880 Nm (650 ft-lb)**

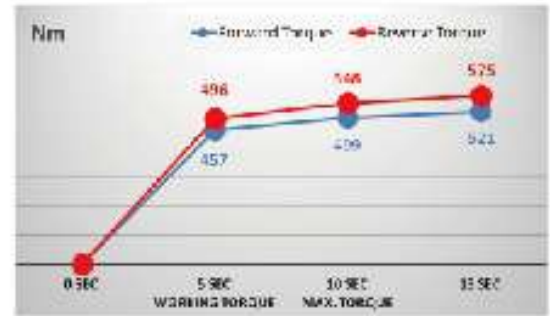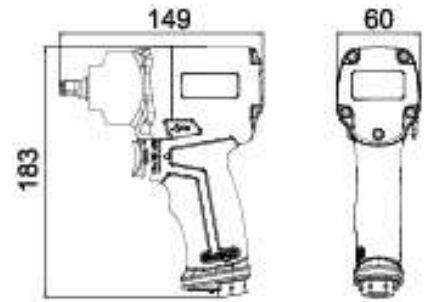

Model	Square Drive		Speed	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses	Air Inlet
	mm	in.	rpm	Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm	in.	in.
2331T	11	3/8	8,300	515	380	108-407	80-300	1.3	2.8	108	3.8	3/8	1/4



Listed specifications are for reference only. Please check our website for updates.




3/8" MINI IMPACT WRENCH

2341J

JUMBO HAMMER



**Breakaway Torque
880 Nm (650 ft-lb)**

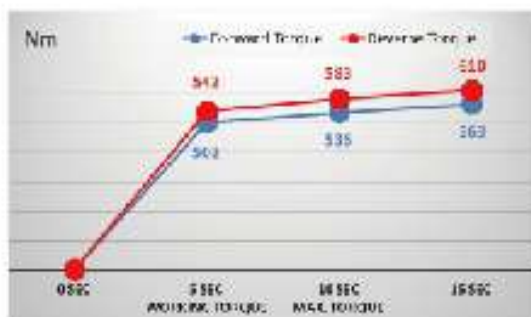


Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2341J	11	3/8	8,500	580	430	122-500	90-370	1.15	2.5	108	3.8	3/8	1/4


Listed specifications are for reference only. Please check our website for updates.

2341T

TWIN HAMMER



**Breakaway Torque
880 Nm (650 ft-lb)**

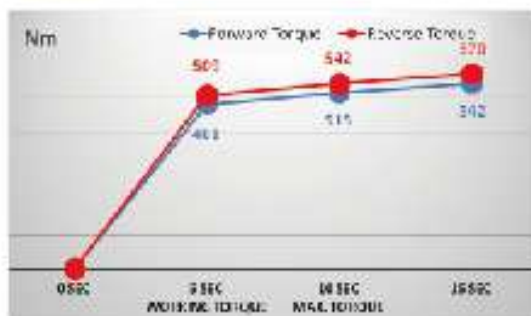

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2341T	11	3/8	8,500	542	400	122-480	90-355	1.15	2.5	108	3.8	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.




3/8" MINI IMPACT WRENCH

2342J

JUMBO HAMMER



**Breakaway Torque
880 Nm (650 ft-lb)**

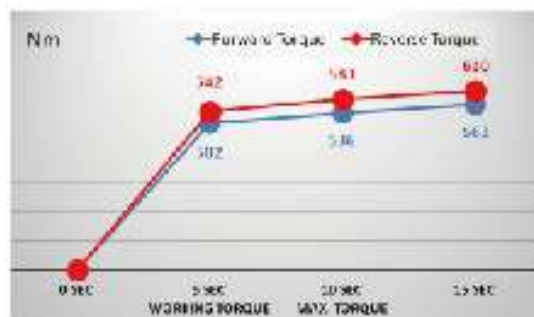

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2342J	11	3/8	8,500	580	430	122-500	90-370	1.2	2.6	108	3.8	3/8	1/4




Listed specifications are for reference only. Please check our website for updates.

2342T

TWIN HAMMER



**Breakaway Torque
880 Nm (650 ft-lb)**

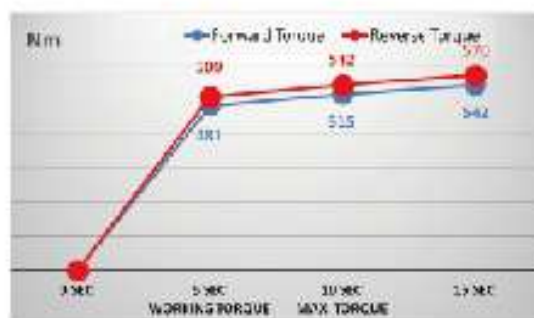



Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2342T	11	3/8	8,500	542	400	122-480	90-355	1.2	2.6	108	3.8	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.


3/8" MINI IMPACT WRENCH

2343J

JUMBO HAMMER



**Breakaway Torque
880 Nm (650 ft-lb)**


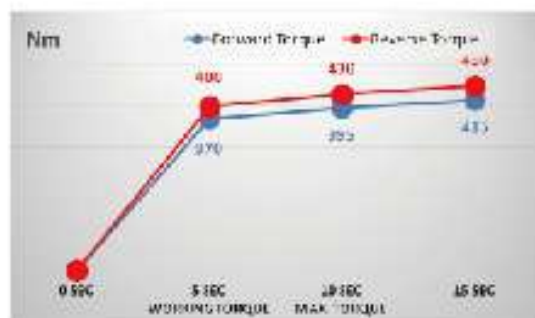


Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2343J	11	3/8	8,500	580	430	122-500	90-370	1.15	2.5	108	3.8	3/8	1/4


Listed specifications are for reference only. Please check our website for updates.

2343T

TWIN HAMMER



**Breakaway Torque
880 Nm (650 ft-lb)**

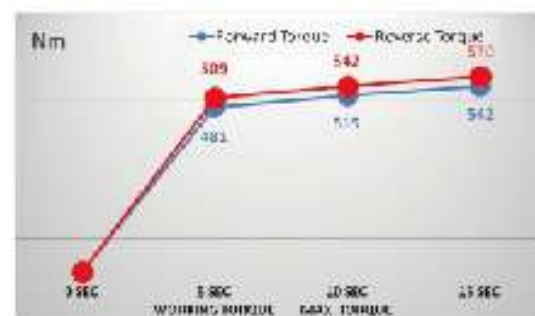

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2343T	11	3/8	8,500	542	400	122-480	90-355	1.15	2.5	108	3.8	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.



THE SMARTER WAY TO WORK HARD

RUGGED FRONT COVER

- Aluminum metal for durability

COMPOSITE HOUSING

- Light weight in its class

ONE HAND F/R SWITCH

- Patent pending design

3 TORQUE SETTINGS

- Easy rotate in both directions



ERGONOMICS HANDLE

- Over-molded rubber handle
- Reduce operating fatigue


1/2" MINI IMPACT WRENCH

2441J

JUMBO HAMMER



**Breakaway Torque
1,150 Nm (850 ft-lb)**


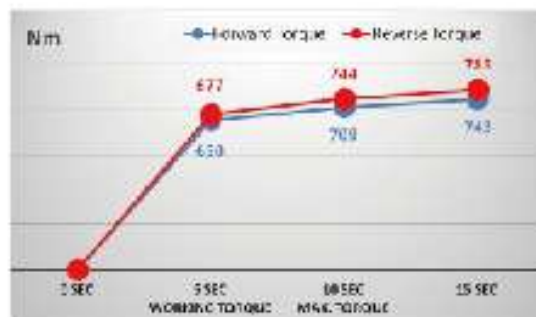


Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2441J	11	1/2	9,500	750	550	122-610	90-450	1.15	2.5	136	4.8	3/8	1/4


Listed specifications are for reference only. Please check our website for updates.

2441T

TWIN HAMMER



**Breakaway Torque
1,080 Nm (800 ft-lb)**

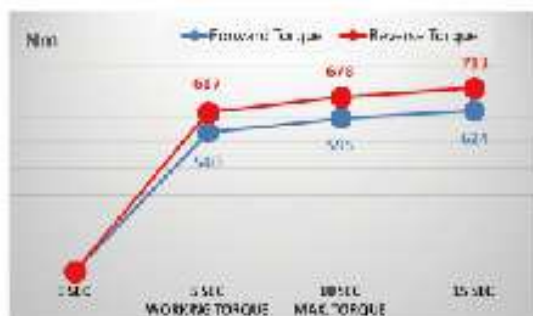

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2441T	11	1/2	7,800	678	500	122-515	90-360	1.16	2.5	136	4.8	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.



THE SMARTER WAY TO WORK HARD

COMPOSITE HOUSING

- Light weight in its class

RUGGED FRONT COVER

- Aluminum metal for durability

F/R PUSH BUTTONS

3 TORQUE SETTINGS

- For various torque needed in
Forward & Reverse



ERGONOMICS HANDLE

- Over-molded rubber handle

1/2" MINI IMPACT WRENCH

2442J

JUMBO HAMMER



**Breakaway Torque
1,080 Nm (800 ft-lb)**





Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2442J	11	1/2	9,500	750	550	122-610	90-450	1.18	2.6	122	4.3	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.

2442T

TWIN HAMMER



**Breakaway Torque
1,080 Nm (800 ft-lb)**



Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2442T	11	1/2	9,500	678	500	122-515	90-380	1.19	2.6	113	4.0	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.



THE SMARTER WAY TO WORK HARD

RUGGED FRONT COVER

Aluminum metal for durability

RUBBER PAD

- Protect the surface

ONE HAND F/R SWITCH

- Patent pending design

2 TORQUE SETTINGS

- Max and lower torque in F/R



ERGONOMICS HANDLE

- Over-molded rubber handle
- Reduce operating fatigue


1/2" MINI IMPACT WRENCH

2443J

JUMBO HAMMER



**Breakaway Torque
1,150 Nm (850 ft-lb)**


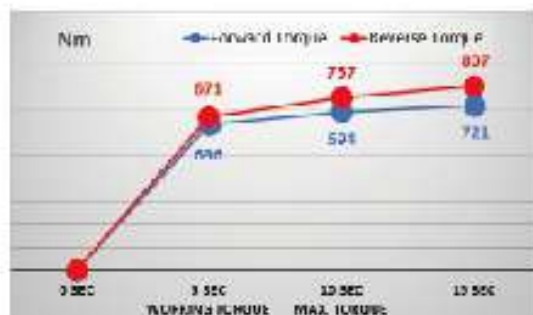


Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2443J	11	1/2	9,500	750	550	122-610	90-450	1.15	2.5	136	4.8	3/8	1/4


Listed specifications are for reference only. Please check our website for updates.

2443T

TWIN HAMMER



**Breakaway Torque
1,080 Nm (800 ft-lb)**

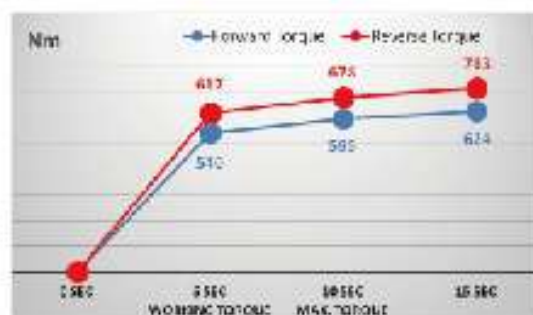

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2443T	11	1/2	7,800	678	500	122-515	90-380	1.16	2.5	136	4.8	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.



1/2" IMPACT WRENCH

2461T

TWIN HAMMER



**Breakaway Torque
1,900 Nm (1,400 ft-lb)**

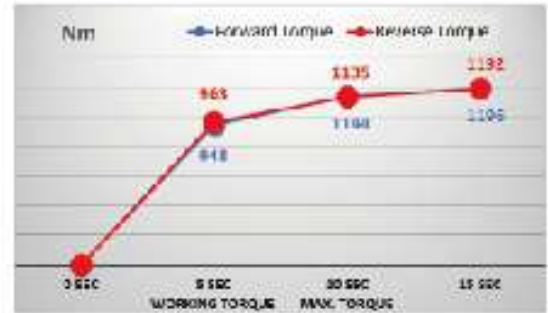

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2461T	13	1/2	7,300	1,085	800	190-920	140-680	2.0	4.4	153	5.4	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.



2431T

TWIN HAMMER



**Breakaway Torque
880 Nm (650 ft-lb)**

**Light Weight
1.3kg**

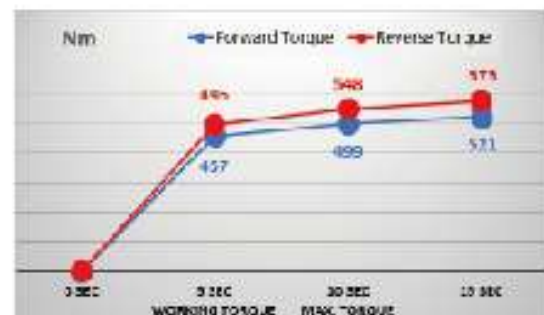

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2431T	13	1/2	8,300	515	380	108-407	80-300	1.30	2.9	108	3.8	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.



1/2" IMPACT WRENCH

2462T

TWIN HAMMER



**Breakaway Torque
2,000 Nm (1,450 ft-lb)**

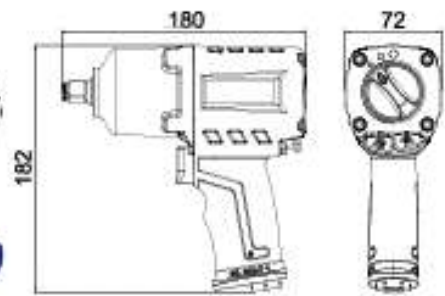

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2462T	11	1/2	7,500	1,130	830	190-950	140-700	2.0	4.4	136	4.8	3/8	1/4



Listed specifications are for reference only. Please check our website for updates.

2463T

TWIN HAMMER



**Breakaway Torque
1,900 Nm (1,400 ft-lb)**

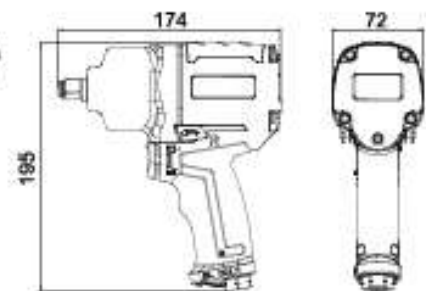

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2463T	11	1/2	7,300	1,085	800	190-922	140-680	2.0	4.4	153	5.4	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.

3/4" IMPACT WRENCH




2561T

TWIN HAMMER



Breakaway Torque
1,900 Nm (1,400 ft-lb)

Light Weight
2.1 kg



Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2561T	11	3/4	7,300	1,085	800	190-920	140-680	2.1	4.6	153	5.4	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.


2562T

TWIN HAMMER



Breakaway Torque
2,000 Nm (1,450 ft-lb)

Light Weight
2.1 kg




Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2562T	11	3/4	7,500	1,130	830	190-950	140-700	2.1	4.6	136	4.8	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.

3/4" IMPACT WRENCH


2563T

TWIN HAMMER

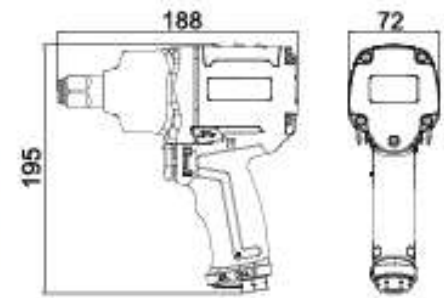

Breakaway Torque
1,900 Nm (1,400 ft-lb)

Light Weight
2.1 kg

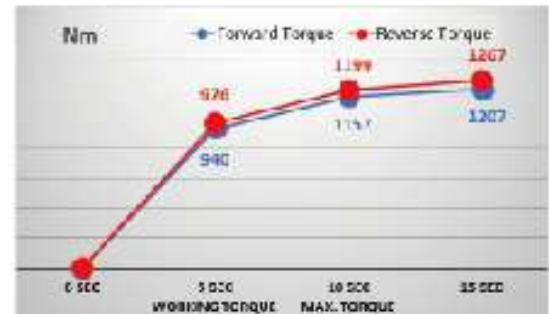

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2563T	11	3/4	7,300	1,085	800	190-920	140-680	2.1	4.6	153	5.4	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.





3/4" IMPACT WRENCH


2641T (3/4" Drive)

2741T (1" Drive)

TWIN HAMMER



Breakaway Torque
2,400 Nm (1,750 ft-lb)

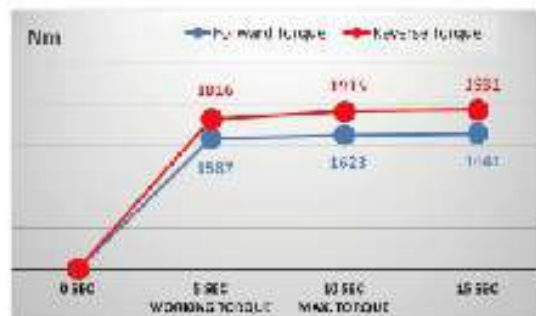



Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2641T	11	3/4	5,300	1,900	1,400	325-1,492	240-1,100	3.4	7.4	224	7.9	1/2	3/8
2741T	25	1											

Listed specifications are for reference only. Please check our website for updates.


2643T (3/4" Drive)

2743T (1" Drive)

TWIN HAMMER



Breakaway Torque
2,400 Nm (1,750 ft-lb)

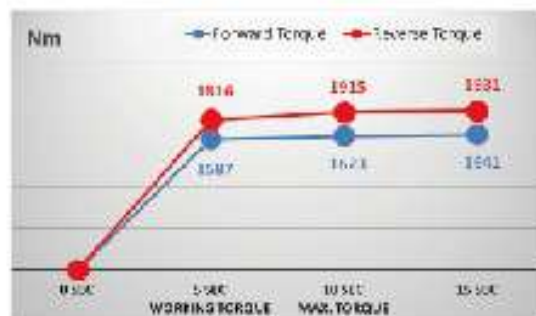

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2643T	11	3/4	5,300	1,900	1,400	325-1,492	240-1,100	3.4	7.4	224	7.9	1/2	3/8
2743T	25	1											

Listed specifications are for reference only. Please check our website for updates.



1" STRAIGHT IMPACT WRENCH

ERGONOMIC HANDLE

- Reduce operating fatigue

F/R 3 TORQUE SETTINGS

- Easy rotate in both directions

RUGGED FRONT COVER

- Aluminum metal for durability
- W/ Twin Hammer inside

INNER/ OUTER TRIGGER DESIGN

- Selectable trigger operation

UPWARD/ DOWNWARD PLASTIC EXHAUST COVER

- For light weight
- Customized air exhaust direction

BACKWARD/ DOWNWARD AIR INLET DESIGN



- Selectable inlet direction



2801T

Twin Hammer

POWERFUL IN COMPACT SIZE
Torque 2,983 Nm / 2,200 ft-lb

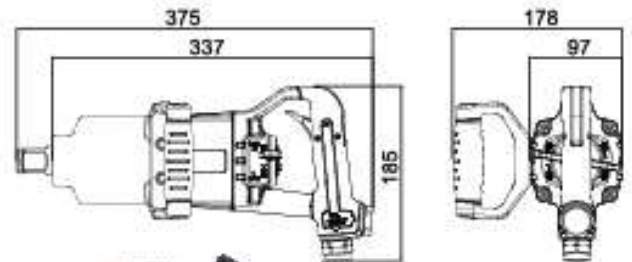

RUBBER BOOT

6.8 kg

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2801T	25	1	5,500	2,983	2,200	515-2,576	380-1,900	6.8	14.9	340	12	3/4	1/2

Listed specifications are for reference only. Please check our website for updates.

1" STRAIGHT IMPACT WRENCH



2801T-6

Twin Hammer

Torque 2,983 Nm / 2,200 ft-lb



7.7 kg

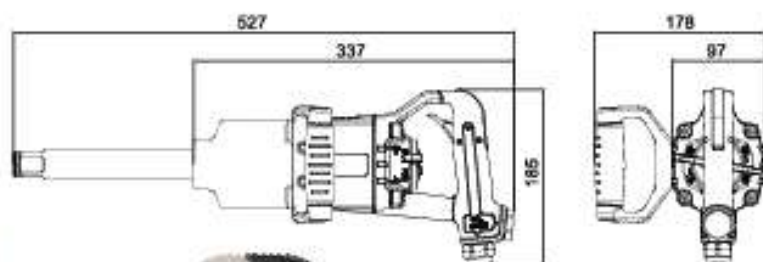

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2801L-6	11	1	5,500	2,983	2,200	515-2,576	380-1,900	7.7	17.0	340	12	3/4	1/2

Listed specifications are for reference only. Please check our website for updates.


2801T-8

Twin Hammer

Torque 2,983 Nm / 2,200 ft-lb



8.0 kg

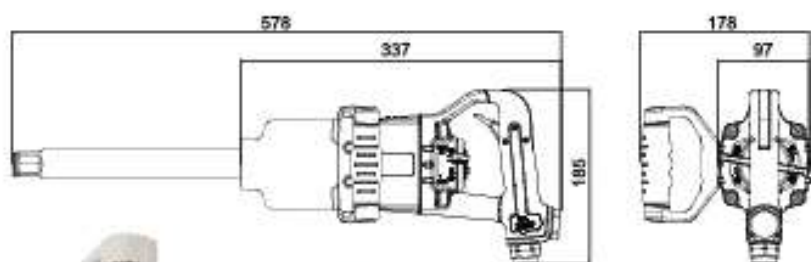

Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2801L-8	11	1	5,500	2,983	2,200	515-2,576	380-1,900	8.0	17.6	340	12	3/4	1/2

Listed specifications are for reference only. Please check our website for updates.


1" STRAIGHT IMPACT WRENCH



2801L

PINLESS

HIGH FORCE LESS VIBRATION
Torque 2,712 Nm / 2,000 ft-lb

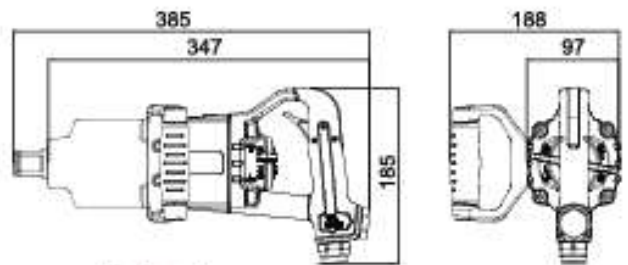

7.8 kg



Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2801L	25	1	5,500	2,712	2,000	515-2,440	380-1,800	7.8	17.2	340	12	3/4	1/2

Listed specifications are for reference only. Please check our website for updates.

1" STRAIGHT IMPACT WRENCH

2801L-6

PINLESS

Torque 2,712 Nm / 2,000 ft-lb



Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2801L-6	11	1	5,500	2,712	2,000	515-2,400	380-1,800	8.7	19.2	340	12	3/4	1/2

Listed specifications are for reference only. Please check our website for updates.

2801L-8

PINLESS

Torque 2,712 Nm / 2,000 ft-lb



Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	kg	lb	l/min	cfm		
2801L-8	11	1	5,500	2,712	2,000	515-2,400	380-1,800	9.0	19.8	340	12	3/4	1/2

Listed specifications are for reference only. Please check our website for updates.



0.3 HP ORBITAL SANDER



1 OPERATOR COMFORT

With ergonomic palm shape

2 POWERFUL MOTOR

Powerful 0.3HP (210W) motor

3 DURABLE MATERIAL

*Rotors material: **POM+RTP** / Rotor blades material: **Bakelite***

4 STEPLESS SPEED REGULATOR

5 OIL FREE DESIGN

Reduce tool maintenance


6 LIGHT WEIGHT HOUSING

Light weight composite housing reduces hand fatigue




2.5 mm Random Orbital Sanders

FS52HA1 (5" Non Vacuum)

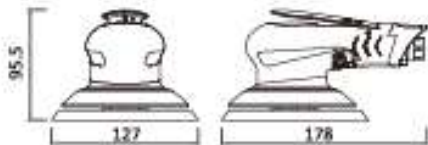


FS62HA1 (6" Non Vacuum)

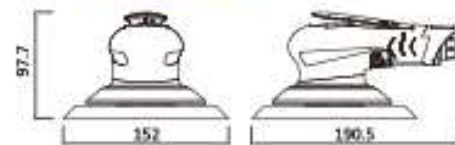

FS52HB1 (5" Central Vacuum)



FS62HB1 (6" Central Vacuum)

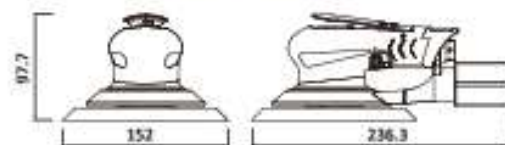

FS52HC1 (5" Self-Generated Vacuum)



KFS001-Hose&Bag

FS62HC1 (6" Self-Generated Vacuum)



KFS001-Hose&Bag

Model	Pad Size		Speed rpm	Dia. Orbit		Vacuum Type	Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		mm	in.		kg	lb	l/min	cfm		
FS52HA1	127	5	12,000	2.5	3/32	Non Vac	0.88	1.95	99	3.5	3/8	1/4
FS62HA1	152	6				Non Vac	0.91	2.01				
FS52HB1	127	5				Central Vac	0.93	2.05				
FS62HB1	152	6				Central Vac	0.96	2.11				
FS52HC1	127	5				Self-generated Vac	0.93	2.05				
FS62HC1	152	6				Self-generated Vac	0.96	2.12				


Listed specifications are for reference only. Please check our website for update.

5 mm Random Orbital Sanders

FS55HA1 (5" Non Vacuum)



FS65HA1 (6" Non Vacuum)

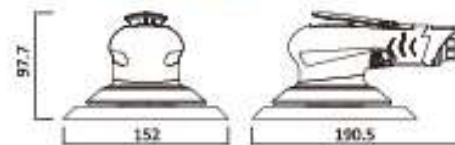

FS55HB1 (5" Central Vacuum)



FS65HB1 (6" Central Vacuum)



FS55HC1 (5" Self-Generated Vacuum)



KFS001-Hose&Bag

FS65HC1 (6" Self-Generated Vacuum)



KFS001-Hose&Bag

Model	Pad Size		Speed rpm	Dia. Orbit		Vacuum Type	Weight		Avg. Air Cons.		Min Hoses in.	Air Inlet in.
	mm	in.		mm	in.		kg	lb	l/min	cfm		
FS55HA1	127	5	12,000	5	3/16	Non Vac	0.91	2.00	99	3.5	3/8	1/4
FS65HA1	152	6				Non Vac	0.95	2.09				
FS55HB1	127	5				Central Vac	0.95	2.10				
FS65HB1	152	6				Central Vac	0.99	2.19				
FS55HC1	127	5				Self-generated Vac	0.96	2.11				
FS65HC1	152	6				Self-generated Vac	1.00	2.20				

Listed specifications are for reference only. Please check our website for updates.

PRO SERIES

SPEED REGULATOR

- Tool-free adjustable knob for easily and fast control

COMPOSITE OVERMOLD GRIP

- Ergonomic design for increased comfort and reduce cold air transmission to operators

SAFERY THROTTLE LEVER

- Excellent control with progressive trigger to control speed and prevent accidental start ups



PROFESSIONAL AIR TOOLS - STRAIGHT LINE

Ratchet Wrench

Applications: To tighten or loosen nuts and bolts.

3232 (1/4" Drive)

3332 (3/8" Drive)



3363 (3/8" Drive)

3463 (1/2" Drive)



Model	Square Drive		Speed rpm	Working Torque @ 90 psi		Length		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		Nm	ft-lb	mm	in.	kg	lb	l/min	cfm		
3232	6	1/4	270	40	30	210	8.3	0.62	1.4	79	2.8	3/8	1/4
3332	10	3/8											
3363	10	3/8	200	81	60	265	10.4	1.40	3.1	113	4.0	3/8	1/4
3463	13	1/2											

Drill

Applications: Drilling holes in various materials.

4522H (High Speed For soft materials)



4522L (Low Speed For hard materials)



Model	Chuck		Speed rpm	Horsepower		Length		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		hp	w	mm	in.	kg	lb	l/min	cfm		
4522H	10	3/8	22,000	0.5	330	205	8.1	0.78	1.7	113	4.0	3/8	1/4
4522L	10	3/8	2,500	0.5	330	215	8.5	1.04	2.3				

FINISHING TOOLS

Applications: Used tire retreading & repair / Label and sticker remover.

5613 (Air Tire Buffer)



5713 (Air Stripping Tool)



Model	Output Size	Speed rpm	Horsepower		Length		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm		hp	w	mm	in.	kg	lb	l/min	cfm		
5613	7/16 HEX	2,500	0.5	330	210	8.3	1.0	2.2	113	4.0	3/8	1/4
5713	5/16-24UNF	4,000	0.5	330	225	8.9						

ANGLE SANDER

Applications: Surface finish sanding.

5222 (2" Pad)



5212 (1-1/4" Pad)



Model	Pad Size		Speed rpm	Horsepower		Length		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		hp	w	mm	in.	kg	lb	l/min	cfm		
5222	51	2	16,000	0.3	220	165	6.5	0.58	1.3	77	2.7	3/8	1/4
5212	30	1-1/4	8,000	0.3	220	160	6.3	0.55	1.2				

Listed specifications are for reference only. Please check our website for updates.

1/4" Die Grinder

Applications: Light metal grinding weld, surface removal, sanding deburring.

6343 (0.5 hp)



6343-5 (5" Extension)



6343-7 (7" Extension)



6343-12 (12" Extension)



6343-A (Angle Die Grinder)



6343-B (115° Angle Die Grinder)



6342 (0.3 hp)



6342-5 (5" Extension)



6342-A (Angle Die Grinder)



6342-B (115° Angle Die Grinder)



Model	Collet Size		Speed rpm	Horsepower		Length		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.		
	mm	in.		hp	w	mm	in.	kg	lb	liters	cfm				
6346			22,000			170	6.7	0.66	1.5						
6343-5			20,000			260	10.2	0.99	2.2						
6343-7			20,000	0.5	330	340	13.4	1.30	2.9	113	4.0				
6343-12			20,000			440	17.3	1.50	3.3						
6343-A	6	1/4	18,000			170	6.7	0.80	1.8					3/8	1/4
6343-B			18,000			197	7.8	0.80	1.8						
6342			25,000			150	5.9	0.36	0.8						
6342-5			24,000	0.3	220	248	9.8	0.64	1.4	77	2.7				
6342-A			22,000			158	6.2	0.55	1.2						
6342-B			22,000			185	7.3	0.55	1.2						

Listed specifications are for reference only. Please check our website for updates.

7103A (Gear Driven Air Saw)



7103C (2" Circular Saw)



7323 (Air Nibbler)



7423 (Air Metal Shear)



Model	Cutting Steel		Speed rpm	Horsepower		Length		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		hp	w	mm	in.	kg	lb	l/min	cfm		
7103A	5	1.13	7,000	0.5	330	310	12.2	1.40	3.1	113	4.0	3/8	1/4
7103C	8	0.30	3,500	0.5	330	244	9.6	1.04	2.3	57	4.0		
7323	1.4	0.06	3,500	0.5	330	195	7.7	0.81	1.8	113	2.0		
7423	1.2	0.05	2,500	0.5	330	250	9.8	1.21	2.7	113	4.0		

7233 (3" Air Cut-off Tool)



Model	Wheel Size		Speed rpm	Horsepower		Length		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		hp	w	mm	in.	kg	lb	l/min	cfm		
7233	76	3	20,000	0.5	330	180	7.1	0.84	1.9	113	4.0	3/8	1/4

7522



7523



Air Knife Blade



Model	Cutting Distance		Speed rpm	Horsepower		Length		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		hp	w	mm	in.	kg	lb	l/min	cfm		
7522	3	0.12	20,000	0.3	220	180	7.1	0.67	1.5	54	1.9	3/8	1/4
7523	3	0.12	20,000	0.5	330	195	7.7	0.97	2.1	113	4.0		

MINI SERIES

SHORT

- For hard to reach places

LIGHTWEIGHT

- Minimizes operator fatigue for comfort

RUBBER OVERMOLD GRIP

- For increased comfort and reduce cold air transmission to operators



MINI AIR TOOLS - STRAIGHT LINE

Ratchet Wrench

Applications: To tighten or loosen nuts and bolts.

3221 (1/4" Drive)



3321 (3/8" Drive)



Model	Square Drive		Speed rpm	Working Torque @ 90 psi		Length		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	in.			Nm	ft-lb	mm	in.	kg	lb	l/min	cfm		
3221	1/4		300	30	22	125	4.9	0.46	1.0	130	4.6	3/8	1/4
3321	3/8												

Mini 2" Sander

Applications: Surface finish, Sanding.

5221 (Orbital Sander)



5421 (Disc Sander)



Model	Pad Size		Speed rpm	Horsepower		Length		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		hp	w	mm	in.	kg	lb	l/min	cfm		
5221	51	2	22,000	0.3	184	108	4.3	0.42	0.9	130	4.6	3/8	1/4
5421													

Die Grinder

Applications: Debarring light metal grinding, weld, surface removal.

6341



6341-A



Model	Collet Size		Speed rpm	Horsepower		Length		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		hp	w	mm	in.	kg	lb	l/min	cfm		
6341	6	1/4	30,000	0.3	184	118	4.7	0.30	0.7	130	4.6	3/8	1/4
6341-A	6	1/4	22,000	0.3	184	108	4.3	0.42	0.9				

Mini 2" Grinder

Applications: Debarring light metal grinding, weld, surface removal.

6221



Model	Wheel Size		Speed rpm	Horsepower		Length		Weight		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		hp	w	mm	in.	kg	lb	l/min	cfm		
6221	51	2	22,000	0.3	184	108	4.3	0.42	0.9	130	4.6	3/8	1/4

Listed specifications are for reference only. Please check our website for updates.

HEAVY DUTY RATCHET WRENCH

3380 (3/8" Drive)

3480 (1/2" Drive)

1 DUAL PAWL

Reactionless operation reduces twisting force

2 100 ft-lb TORQUE

100 ft-lb torque output to remove stubborn fasteners

3 SELECTOR LOCK KNOB

For easy direction change and lock

4 280 RPM

280 RPM fast removal and installation of fasteners

5 RATCHET HOUSING

Heat-treated ratchet housing for durability

6 EXHAUST DEFLECTOR

360° Exhaust to direct air away from user

7 TRIGGER KNOB

Tip valve style trigger for precise control

8 CUSHINO GRIP

Over-molded grip for added comfort and reduce vibration



Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Length		Avg. Air Cons.		Min Hoes in.	Air Inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	mm	in.	l/min	cfm		
3380	10	3/8	280	136	100	120	90	308	12.3	122	4.3	3/8	1/4
3480	13	1/2											

Listed specifications are for reference only. Please check our website for updates.

REACTIONLESS RATCHET WRENCH

3381 (3/8" Drive)

3481 (1/2" Drive)

1 DUAL PAWL

Reactionless operation reduces twisting force

2 100 ft-lb TORQUE

100 ft-lb torque output to remove stubborn fasteners

3 SELECTOR LOCK KNOB

For easy direction change and lock

4 900 RPM

900 RPM fast removal and installation of fasteners

5 RATCHET HOUSING

Heat-treated ratchet housing for durability

6 EXHAUST DEFLECTOR

360° Exhaust to direct air away from user

7 TRIGGER KNOB

Tip valve style trigger for precise control

8 CUSHINO GRIP

Over-molded grip for added comfort and reduce vibration



Model	Square Drive		Speed rpm	Max. Torque @ 90 psi		Working Torque @ 90 psi		Length		Avg. Air Cons.		Min Hoes in.	Air inlet in.
	mm	in.		Nm	ft-lb	Nm	ft-lb	mm	in.	l/min	cfm		
3381	10	3/8	900	136	100	120	90	308	12.3	122	4.3	3/8	1/4
3481	13	1/2											

Listed specifications are for reference only. Please check our website for updates.



De Poan Pneumatic Corp.

No. 81, Museum Rd., Bali Dist., New Taipei City, 24947, Taiwan
Tel: +886-2-2619-5619 Fax: +886-2-2619-5777
www.depoan.com E-mail: service@depoan.com